



DIN 7504 K - sim. ISO 15480

Self drilling screws type K

hexagon head with flange

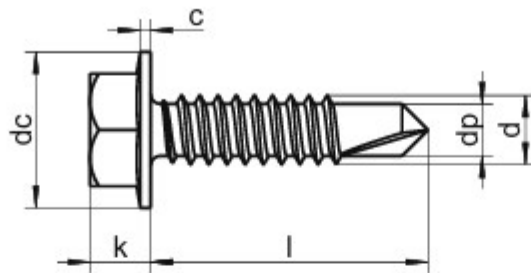

dp	2,8	3,1	3,6	4,1	4,8	5,8
s	5,5	5,5	7	8	8	10
c	0,6	0,6	0,9	0,9	1,0	1,0
k max.	3,45	3,45	4,25	4,45	5,45	6,45
dc max.	8,3	8,3	8,8	10,5	11,0	13,2
e min.	5,96	5,96	7,59	8,71	8,71	10,95
●	5,5	5,5	7	8	8	10
Length / Ø	ST3,5	ST3,9	ST4,2	ST4,8	ST5,5	ST6,3
9,5 (3/8")	▲	▲	▲	▲	▲	
13 (1/2")	▲	▲	▲	▲	▲	
16 (5/8")	▲	▲	▲	▲	▲	
19 (3/4")	▲	▲	▲	▲	▲	▲
22 (7/8")	▲	▲	▲	▲	▲	▲
25 (1")	▲	▲	▲	▲	▲	▲
32 (1 1/4")		▲	▲	▲	▲	▲
35 (1 3/8")		▲	▲	▲	▲	▲
38 (1 1/2")		▲	▲	▲	▲	▲
45 (1 3/4")				▲	▲	▲
50 (2")				▲	▲	▲
60 (2 3/8")					▲	
70 (2 3/4")					▲	
80 (3 1/8")					▲	
90 (3 1/2")					▲	
100 (4")					▲	
110 (4 1/4")					▲	
120 (4 3/4")					▲	
130 (5 1/8")					▲	
SU	1000	1000 ≥ 32 500	1000 ≥ 32 500	500 ≥ 32 200	200	200