


sim. ISO 7049 - **DIN 7981 H**

Tapping screws

pan head with cross recess H (Phillips), type C (with cone point)

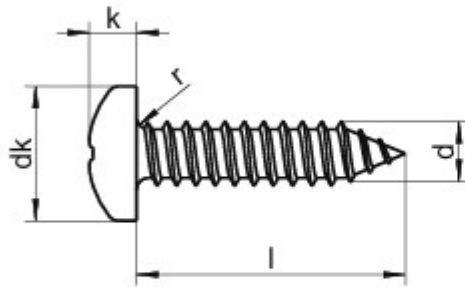

dk	4,2	5,6	6,9	7,5	8,2	9,5	10,8	12,5
k min.	1,55	1,95	2,35	2,55	2,75	3,25	3,65	4,25
k max.	1,80	2,20	2,60	2,80	3,05	3,55	3,95	4,55
r max.	0,3	0,4	0,5	0,5	0,6	0,7	0,8	0,9
⊕	P 1	P 1	P 2	P 2	P 2	P 2	P 3	P 3
Length / Ø	ST2,2	ST2,9	ST3,5	ST3,9	ST4,2	ST4,8	ST5,5	ST6,3
4,5 (1/6")	▲ ●							
6,5 (1/4")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●			
9,5 (3/8")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
13 (1/2")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
16 (5/8")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
19 (3/4")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
22 (7/8")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
25 (1")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
32 (1 1/4")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
38 (1 1/2")		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
45 (1 3/4")			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
50 (2")			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
55 (2 1/8")			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
60 (2 3/8")			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
70 (2 3/4")			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
80 (3 1/8")				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
90 (3 1/2")					▲ ●	▲ ●	▲ ●	▲ ●
100 (4")					▲ ●	▲ ●	▲ ●	▲ ●
120 (4 3/4")						▲ ●	▲ ●	▲ ●
SU	1000	1000	1000 ≥ 32 500	1000 ≥ 32 500	1000 ≥ 32 500 ≥ 50 200	1000 ≥ 22 500 ≥ 32 200	500 ≥ 32 100	200 ≥ 32 100