


DIN 7982 H - sim. ISO 7050

Tapping screws

countersunk head with cross recess H (Phillips), type C (with cone point)

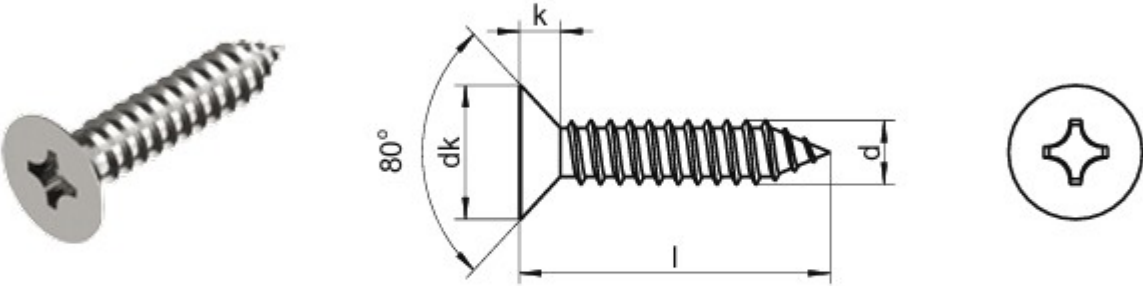

dk k ⊕	4,3 1,3 P 1	5,5 1,7 P 1	6,8 2,1 P 2	7,5 2,3 P 2	8,1 2,5 P 2	9,5 3,0 P 2	10,8 3,4 P 3	12,4 3,8 P 3
Length / Ø	ST2,2	ST2,9	ST3,5	ST3,9	ST4,2	ST4,8	ST5,5	ST6,3
6,5 (1/4")	▲ ●	▲ ●	▲ ●	▲ ●				
9,5 (3/8")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●		
13 (1/2")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
16 (5/8")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
19 (3/4")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
22 (7/8")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
25 (1")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
32 (1 1/4")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
38 (1 1/2")		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
45 (1 3/4")			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
50 (2")			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
55 (2 1/8")			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
60 (2 3/8")			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
70 (2 3/4")			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
80 (3 3/8")					▲ ●	▲ ●	▲ ●	▲ ●
90 (3 1/2")					▲ ●	▲ ●	▲ ●	▲ ●
100 (4")					▲ ●	▲ ●	▲ ●	▲ ●
120 (4 3/4")						▲ ●	▲ ●	▲ ●
SU	1000	1000	1000 ≥ 32 500	1000 ≥ 32 500	1000 ≥ 32 500 ≥ 50 200	1000 ≥ 22 500 ≥ 32 200	200 ≥ 32 100	200 ≥ 32 100