


Tapping screws

raised countersunk head with cross recess H (Phillips), type C (with cone point)

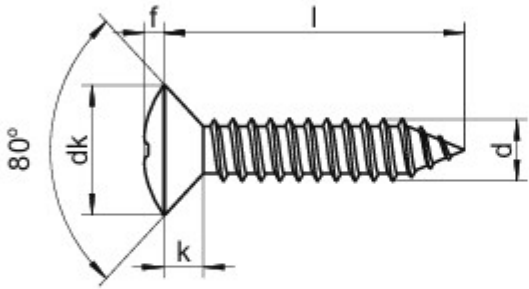

dk	4,3	5,5	6,8	7,5	8,1	9,5	10,8	12,4
f	0,7	0,9	1,2	1,3	1,4	1,5	1,7	2,0
k	1,3	1,7	2,1	2,3	2,5	3,0	3,4	3,8
⊕	P 1	P 1	P 2	P 2	P 2	P 2	P 3	P 3
Length / Ø	ST2,2	ST2,9	ST3,5	ST3,9	ST4,2	ST4,8	ST5,5	ST6,3
6,5 (1/4")	▲ ●	▲ ●	▲ ●	▲ ●				
9,5 (3/8")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●			
13 (1/2")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
16 (5/8")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
19 (3/4")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
22 (7/8")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
25 (1")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
32 (1 1/4")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
38 (1 1/2")		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
45 (1 3/4")			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
50 (2")			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
60 (2 3/8")				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
70 (2 3/4")				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
80 (3 3/8")					▲ ●	▲ ●	▲ ●	▲ ●
90 (3 1/2")						▲ ●	▲ ●	▲ ●
100 (4")						▲ ●	▲ ●	▲ ●
SU	1000	1000	1000 ≥ 32 500	1000 ≥ 32 500	1000 ≥ 32 500 ≥ 50 200	500 ≥ 32 200	200 ≥ 32 100	200 ≥ 32 100

■ A1 / ▲ A2 / ● A4 | SU: Sales units | All measurements in mm / inch | Other dimensions on request.